

POS의 기본에 충실한 POS APEXA X



POS의 아이코닉한 디자인을 계승

산업 현장에서 입증한 POSBANK의 대표적인 모델
APEXA의 디자인 컨셉을 유지한 가장 친숙하고 깔끔한 디자인 POS입니다.



간단한 듀얼 모니터 설치와 쉬운 유지 보수

DisplayPort mini DP 포트가 있어 듀얼 모니터를 손쉽게 설치할 수 있으며 별도의 CMOS 전원 설정을 하지 않아도 되어 유지 보수가 용이해집니다.



I/O 포트 개선 (9핀 시리얼 DB9 2개 제공)

2개의 DB9 포트 제공으로 자사 전작 대비 I/O 포트가 개선되었으며 주변기기 연결이 용이합니다.



뛰어난 가성비

높은 사양과 세련된 디자인을 합리적인 가격으로 제공합니다.




향상된 성능 N97(3.6GHz), 4GB/128GB, 스피커 기본

Intel의 12세대 Alder Lake를 적용한 Intel N97로 리테일, 외식업 전반에 필요로 하는 다양하고 파워풀한 기능을 수행할 수 있습니다.



N97
CPU




4GB
MEMORY



128GB
SSD

POS CPU 성능 비교

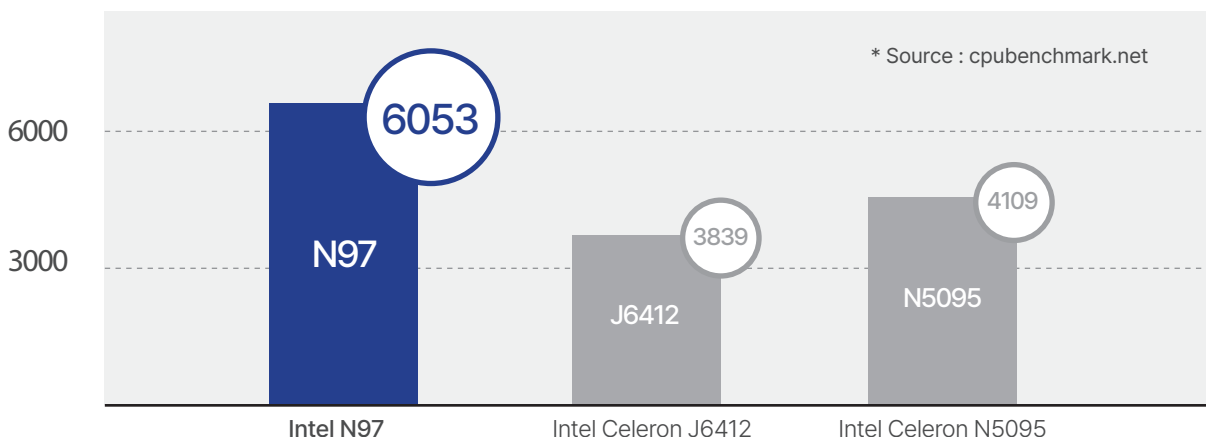

제품 사양

System	
Processor	Intel® Processor N97 6M Cache, up to 3.60 GHz
Chipset	Intel® Alder Lake-N
Memory	4GB Standard, DDR4 3200 MT/s, Socket 1 x SODIMM
Storage	SATA 3 (6Gb/s) 2.5 inch SSD 128GB, Support AHCI
Operating System	Windows 10 IoT LTSC 2021 버전 21H2 이상
Audio	HD Audio Codec

Display	
Type	15" TFT LCD, LED Backlight
Resolution	1024 × 768
Brightness	300 cd/m² (typ.)
Touchscreen	Projected Capacitive Touch,

Interface	
Display	Displayport (MiniDP/ With Power Output)
USB	6 x External Ports (USB 3.0 X 2 , USB 2.0 X 4)
Serial	5 x External Ports COM1 with 5V/12V power output on the D-sub pin 9 COM2, COM3 RJ-45 pin 8 COM5 D-sub pin 9 COM6 Tx/Rx Only RJ-45 Reserved for MSR
Cash Drawer Port	(RJ-12 6 Pins) x 1
LAN	1 x Gigabit Ethernet (RJ-45)
Audio	1 x Line-out
Power DC-IN	4 Pin DIN Jack
Extension Slot	M.2 2242 for SSD (Factory Option)

Power	
Power Supply	Adapter 12V, 5A (4P DIN)

Physical & Environmental	
Operating Temperature	0°C ~ 60°C at 10% to 90% Humidity
Storage Temperature	-20°C ~ 80°C at 10% to 90% Humidity
Dimensions (W x H x D)	364 × 210 × 333 (mm), 14.3 × 8.2 × 13.1 (in)
Packing Dimensions (W x H x D)	500 × 300 × 470 (mm), 19.6 × 11.8 × 18.5 (in)
Net Weight	5,300g, 11.68 lbs
Packing Weight	8,000g, 17.63 lbs
Certification	KC, CE, FCC

Options & Peripherals	
2nd Displays	9.7", 10.1", 15" LCD Display (Optional Touchscreen)
Customer Display	VFD, 20 Columns x 2 Lines
Magnetic Stripe Reader	Comply with ISO 7811, Support 1 & 2 & 3 Track
Smart Card Reader	EMV Level 1
Dallas	Dallas i-button Reader
Fingerprint	Yes
Serial Conversion Cable	RJ-45 to D-sub 9
Wall Mount Kit	VESA-Compatible, 75 × 75 (mm), 100 × 100 (mm)
Speaker	2 × 1W (Factory Option)
TPM	Support

* 사양은 사전 예고 없이 변경될 수 있습니다.

제품 규격

